

# INSTALLATION INSTRUCTION

## InvisiLED® Palette & Daylight to Sunset

### LED-TC

WAC LIGHTING  
Responsible Lighting®

#### SAFETY INSTRUCTION

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- Always turn off power at fuse box prior to installation to prevent electrical shock.
- Intended for indoor use. Dry and damp locations.
- For installation by a qualified electrician.
- System is intended for installation in accordance with National Electric Code, and local regulations.
- Consult with local inspector to assure compliance.

**INVISILED™ Palette & Daylight to sunset** Tape Lights have polarity for connection.

- If a 1/2"x1/2" or greater cove or channel is not built-in, a Retrofit Channel may be necessary to conceal the tape lights or provide an extended surface for mounting or directing the light.

#### WIRING AND INSTALLATION:

Please refer to installation diagrams shown on next page.

1. Determine the number of separately powered runs needed. Calculate the number of power supplies.

Min. / max. run length	6 inch / 40 ft per run
Current	100 mA/ft
Power consumption	1.5 Watts/ft

2. Measure the length of each run and round it off to the nearest 6-inch interval. Determine the necessary quantities of 1-ft, 5-ft.
3. Count the number of turns in the runs.
4. If making lateral turns at angles other than 90°, determine the number of joiner cables necessary to make the lateral angles.
5. Connect the DC power supply to incoming 120V supply.

##### *Hard Wire*

- DC power supply must be installed away from heat sources and accessible for service
- Enclosed DC power supply is UL listed. The power supply box has a separate line volt, and low volt wiring compartments. Trade size knock out are provided on both compartments. Connect building wires to like color DC power supply wires with wire nuts. Building ground wire may be green or un-insulated, and attaches to green wire from DC power supply box.

##### *Portable*

- 24 Volts DC power supply plugs into standard 120 Volts 3 prong grounded outlet
- Power supply must be installed away from heat sources
- Class II output splices do not require enclosures

6. Connect the output of the DC power supply with the WAC controller (refer to the picture in the next page), then connect the 5 pins female connector of the controller to the 5 pins male connector of the InvisiLED tape, to form straight lines or bend lengthwise around the installation surface;
7. Connect remaining sections using 1-ft and 5-ft sections of tape light or connectors. 6inch LED sections may be cut where indicated at the end of the run only.
8. On smooth surfaces, the included adhesive is sufficient in most applications. However if mounting surface is a porous or textured surface, then use a Mounting Clip every 6 inches to reinforce the installation.
9. Terminate each separately powered run with an end cap. Cut end caps or male end caps are the available choices for cut or uncut sections respectively.

WAC Lighting  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585


Headquarters/Eastern Distribution Center  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center  
1750 Archibald Ave • Ontario, CA 91761  
Phone (800) 526.2588 • Fax (800) 526.2585


INSTALLATION INSTRUCTION  
**InvisiLED® Palette & Daylight to Sunset**  
 LED-TC

**WAC LIGHTING**  
 Responsible Lighting®

**Hard Wire**

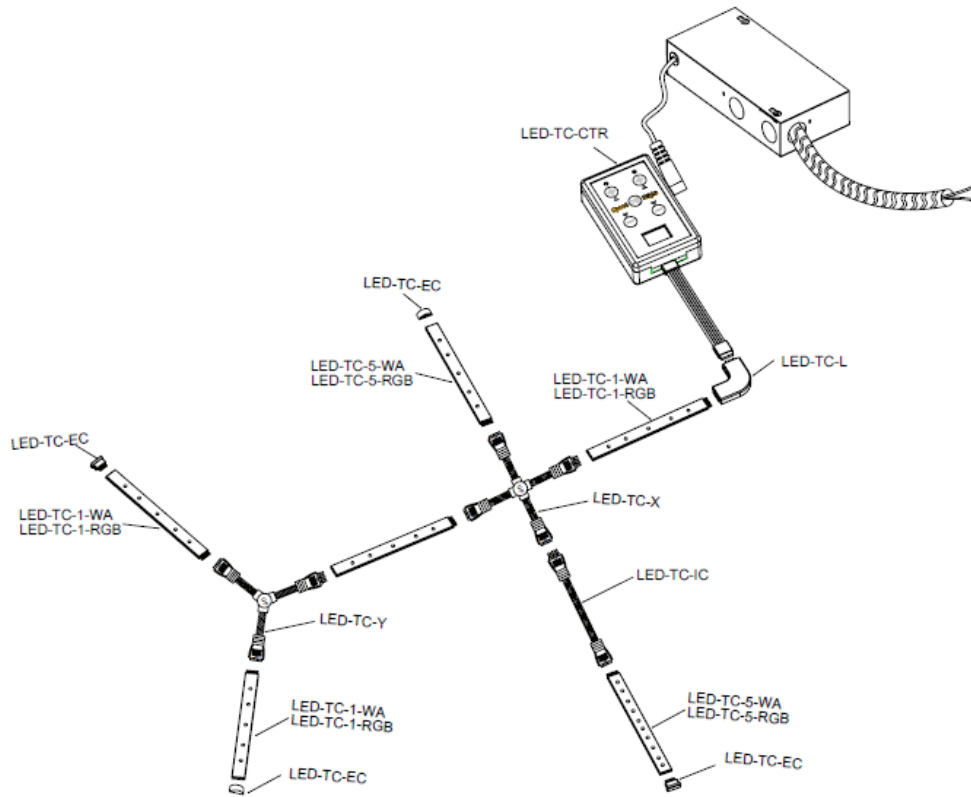

**Portable**

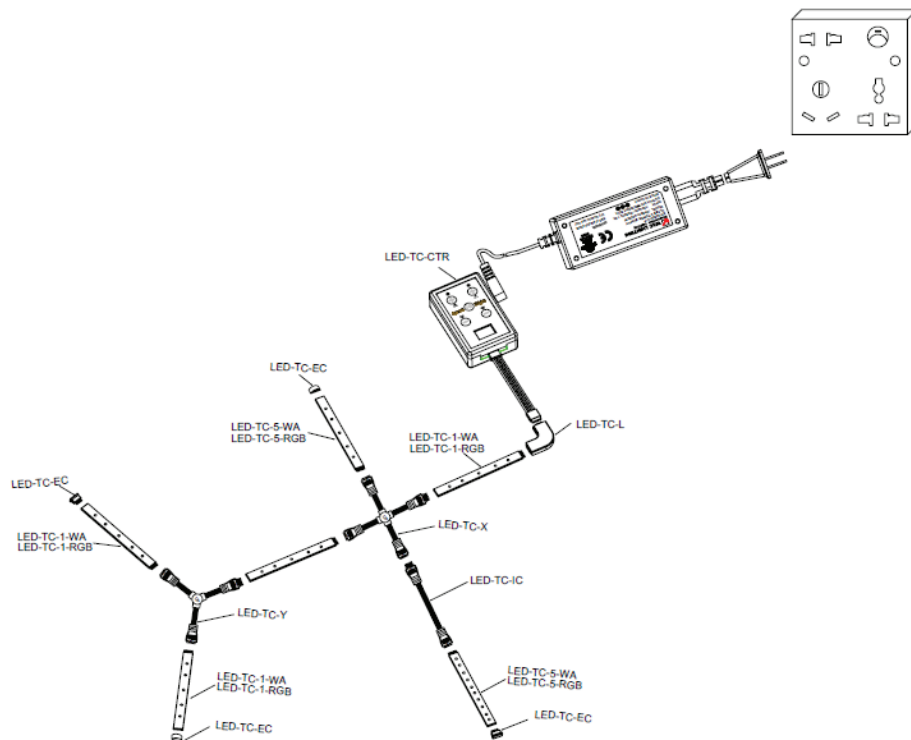

**WAC Lighting**  
 www.waclighting.com  
 Phone (800) 526.2588 • Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
 44 Harbor Park Drive • Port Washington, NY 11050  
 Phone (516) 515.5000 • Fax (516) 515.5050

**Western Distribution Center**  
 1750 Archibald Ave • Ontario, CA 91761  
 Phone (800) 526.2588 • Fax (800) 526.2585