ADEO - model: 195

Low Voltage Quick Connect[™] Luminaire



WAC LIGHTING

Responsible Lighting®

| Fixture Type: | |
|---------------|----|
| Catalog Numbe | r: |
| Project: | |
| Location: | |

PRODUCT DESCRIPTION

Low voltage track head with 360° horizontal rotation and 90° vertical adjustment aiming flexibility. Constructed from machined brass.

SPECIFICATIONS

Construction: Machined brass with metal spring band to retain shade. Shades are either glass or metal.

Finish: Available in electroplated Brushed Nickel (BN).

Lamping: Accepts 12V LED MR16, Halogen MR16 lamps up to 50W max (order lamp separately).

Dimming: Dim to 10% depending on system power supply. Use ELV (electronic low voltage) dimmer with electronic transformer. Use magnetic low voltage dimmer with magnetic transformer.

Standards: UL & CUL Listed.

FEATURES

- Compatible with all Quick Connect[™] rail and track systems when using the proper adapter (see adapter chart on next page)
- Use on all Quick Connect[™] Canopies (see canopy options on next page)
- Additional extensions are available up to 48
- + $\,$ 360° horizontal rotation and 90° vertical adjustment $\,$
- 5 year WAC Lighting product warranty

ORDER NUMBER

| Model # | Lamp and Accessory | Extension | Finish | |
|-----------------|--------------------------------------------|-----------|-------------------|-----------------------------|
| QF-195LEDX3-115 | LED 12V 8W MR16 & G115 Shade Included | | | QF-195LEDX3 115 – BN |
| QF-195LEDX3-116 | LED 12V 8W MR16 & G116 Shade Included | 3" | BN Brushed Nickel | Example: QF-195LEDX3-115-BN |
| QF-195X3 | Halogen 12V 50W max MR16 (Sold Separately) | | | |

GLASS AND SHIELD OPTIONS (ORDER SEPARATELY)

| G111 | | | G112 | | G113 | | G114 a | ased glass | | | G115 m | nesh | G116 s | olid | AM | Amber |
|-------|------|----|---------|------|---------|--------|---------|------------|----|----|---------------|------|---------------|------|----------------|--------------------------------------|
| 2¼″W× | 1¾″H | | 21⁄2″W× | 1¾″H | 33⁄8″W× | 17⁄8″H | 25⁄8″W> | < 2½″H | | | 2¼″W× | 1¾″H | 2¼″W× | 1¾″H | BL | Blue |
| | | | | | | ٢ | | | | | 6 | | | | BN DB RD | Brushed Nickel Dark Bronze Red |
| АМ | BL | wт | АМ | wт | АМ | wт | AM | BL | RD | wт | BN | DB | BN | DB | wт | White |

LED MR16 (ORDER SEPARATELY)

| Model | Finish | Power | ССТ | Volt | Lumens | Average Life | CRI | Beam | Photometry | | | | |
|------------------------|------------------------------------|-------|-------|------|--------|--------------|-----|------|------------|---|--------------------------------------------------|--------|----------------------------|
| MR16LED-BAB | BK Black WT White | 8W | 3000K | 12V | 450 | 25,000 Hours | 85 | 35° | | Ŵ | Q-X18 18' Q-X24 24' Q-X36 36' Q-X48 48' | BN Bro | ushed Nickel ark Bronze |
| Example: MR16LED-BAB-W | т | | | | | | | | | 0 | | | |

See Next Pages for Canopy & Adapter Options

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

EXTENSIONS (ORDER SEPARATELY)

QUICK CONNECT™ ADAPTERS (order one per fixture)



Monopoint Canopies (Remote Transformers Required)

- Order remote transformer separately
- No visible hardware

| | | | | | | | Мос | del | | Finish | |
|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------|----------------------|----------------------------------------------|----------------|-------------------|-------------------------|-------------------------|----------------------|--------------------------------------------------|
| Miniature Round Canopy with Wiring Compartment | | | | 23%8" | - 1¾"- | 5⁄8″ | QMI | P-MI-' | ſR | BN CH DB | Brushed Nickel Chrome Dark Bronze |
| • The recessed "housing" is a • The housing is installed in | 5 1 | | • | s trade s | size connecto | rs | | | | | |
| | | Mode | | nput | Output | Min Load | L | W | Н | | |
| Class 2 Enclosed Electronic Transformers | A series and a s | ^{ሀቢ) us} EN-24 | 60-RB2 | 120V 120V 120V | 12V, 60W 24V, 60W 24V, 96W | 1W 1W 1W | 6½″ 6½″ 6½″ | 15⁄8″ 15⁄8″ 15⁄8″ | 1¼″ 1¼″ 1¼″ | Fits thro | ugh small openings |
| | | EN-12 | 180-RB2 | 120V 120V 120V | 12V, 2 × 60W 12V, 3 × 60W 12V, 5 × 60W | / 1W | 6″ 6¾″ 8½″ | 3¼″ 35⁄8″ 45⁄8″ | 25⁄8″ 25⁄8″ 25⁄8″ | | LED indicator lights gral push in terminals |
| Round Canopy for Junction • Mounts over a standard 4" • Base plate covers junction | junction box | hopy attaches to b | base plate wit | h a met | -4½" | 5⁄8″ | QMF | P-1RN | -TR | BN CH DB WT | Brushed Nickel Chrome Dark Bronze White |
| Square Canopy For Junction | Box | | | | 41/2" | 5⁄8″ | QMF | P-15Q | -TR | BN CH DB | Brushed Nickel Chrome Dark Bronze |
| | | | | | | | | | | DR | Dark Bronze |
| Mounts over a standard 4" Base plate covers junction | , | nopy attaches to b | base plate wit | h metal | nut | | | | | | |
| | box opening, the car | nopy attaches to b | base plate wit | | | lin Load I | | W | н | | |


WAC Lighting

www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. NOV 2015

Monopoint Canopies (Integral Transformers)


- 1W minimum load
- 60W Integral electronic transformer
- Smooth and continuous ELV dimming

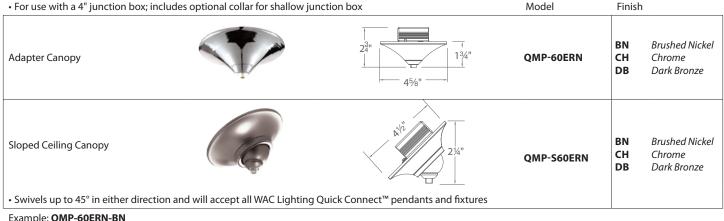

Example: QMP-60ERN-BN

Mirror Glass Multipoint Canopies (Integral Transformers)

- 1W minimum load
- 60W Integral electronic transformer for each drop
- Smooth and continuous ELV dimming

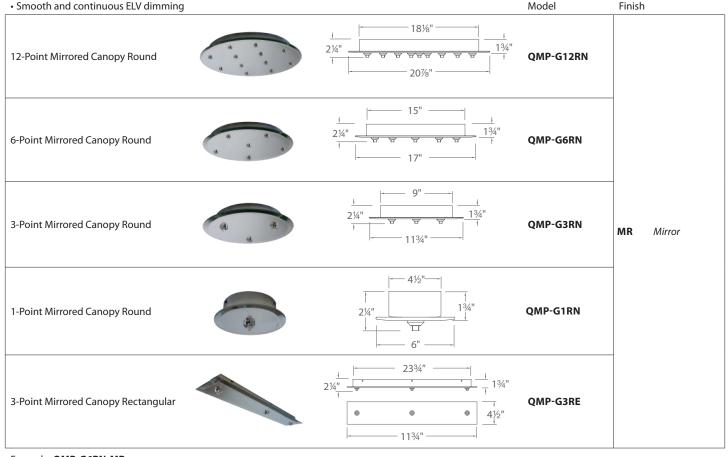

Example: QMP-G6RN-MR

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. NOV 2015