AETHER 3.5" SHALLOW IC LED DOWNLIGHT

WAC LIGHTING

Wall Wash Trimless - R3ARWL, R3ASWL

Responsible Lighting®





Fixture Type:	
Catalog Number:	
Project:	
.,	
Location:	

PRODUCT DESCRIPTION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

FEATURES

- · Designed to fit in tight plenum
- 3.5" trim aperture, 3.5" housing height
- · Wet location listed for trims
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty
- Title 24 Compliant

SPECIFICATIONS

Construction: Die-cast aluminum trim with extruded aluminum heat sink

Dimming: 100% - 0% with 0-10V dimmer

100% - 5% with Electronic Low Voltage (ELV) dimmer

Input: 120V-277V AC

Power: 15.5W, power factor 0.98

Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated white, black, enamel coated haze, brushed nickel.

Ceiling thickness: ½" - 1½"

Standards: ETL & cETL Wet Location Listed

IC-rated airtight housing with available Chicago plenum version.

TRIM (SEE NEXT PAGE FOR HOUSING)		Beam	Beam Color Temp		CRI	Lumen	Finish	Interior/Trim
R3ARWL Round	- 3½" - 5½"	A Asymmertrical	827 927 830 930 835 840	2700K 2700K 3000K 3000K 3500K 4000K	85 90 85 90 85 85	860 720 900 745 925 935	HZ WT BK BN	Haze White Black Brushed Nickel
R3ASWL Square	$\frac{1}{38^{8}}$ $\frac{1}{28^{8}}$ $\frac{1}{58^{8}}$	A Asymmetrical	827 927 830 930 835 840	2700K 2700K 3000K 3000K 3500K 4000K	85 90 85 90 85 85	830 690 860 715 855 900	HZ WT BK BN	Haze White Black Brushed Nickel


R3A_WL-__-Example: R3ARWL-N930-HZ

AETHER 3.5" SHALLOW IC LED DOWNLIGHT

WAC LIGHTING

Housing - HR-3LED-H17A

Responsible Lighting®

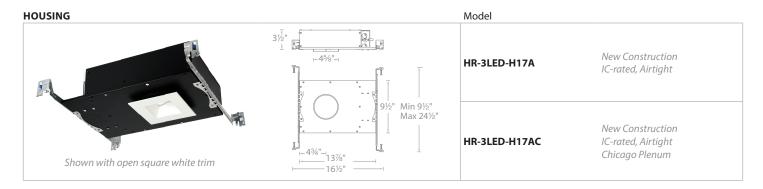

HR-3LED-H17____

Example: HR-3LED-H17A