


# EXTERMINATOR – model: H/L/J-LED20

## LEDme® 120V Track Luminaire

# WAC LIGHTING

## Responsible Lighting®

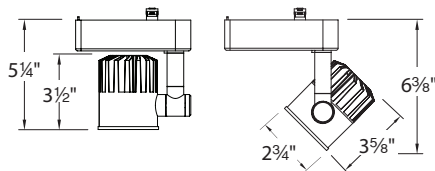

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

LEDme® Exterminator offers superior light output in a small, unobtrusive design. The high output LEDs out perform a 20W metal halide fixture at the size of a typical MR16 luminaire. Developed for upscale residential and commercial environments.

### FEATURES

- Energy Star® rated
- Free of projected heat and UV and IR radiation
- Available in two interchangeable optics that may be ordered separately
- Replaceable LED modules
- Accommodates 1 lens or accessory
- 355° horizontal and 180° vertical aiming
- Lockable vertical aiming for precise adjustments
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

- Construction:** Die-cast aluminum with removable lens cap for easy change of lenses or accessories
- Driver:** Input voltage: 120VAC
- Light Source:** High output COB LED.
- Dimming:** LED lamp dims down to 5% with electronic low voltage (ELV) dimmer. Compatible with LUTRON DVELV-300P and SELV-300P
- Finish:** Black (BK) and White (WT) powder coat paint
- Standards:** ETL & cETL Listed. Energy Star rated.

### FIXTURE PERFORMANCE

Model #	Beam	Voltage	Color Temp	Power	Lumens	Efficacy	CBCP	CRI
<b>LED20S-927</b>	20°	120V	2700K	23W	1085	47 Lm/W	5178	90
<b>LED20F-927</b>	40°				1135	49 Lm/W	2462	
<b>LED20S-27</b>	20°	120V	2700K	23W	1230	53 Lm/W	5853	85
<b>LED20F-27</b>	40°				1230	53 Lm/W	2586	
<b>LED20S-930</b>	20°	120V	3000K	23W	1190	52 Lm/W	5509	90
<b>LED20F-930</b>	40°				1160	50 Lm/W	2518	
<b>LED20S-30</b>	20°	120V	3000K	23W	1345	58 Lm/W	6232	85
<b>LED20F-30</b>	40°				1280	56 Lm/W	2692	
<b>LED20S-35</b>	20°	120V	3500K	23W	1400	61 Lm/W	6620	85
<b>LED20F-35</b>	40°				1385	60 Lm/W	2897	
<b>LED20S-40</b>	20°	120V	4000K	23W	1450	63 Lm/W	6772	85
<b>LED20F-40</b>	40°				1390	60 Lm/W	2928	

### REPLACEABLE LED MODULES

2700K (90 CRI)	<b>BXRC-27G1000</b>
2700K	<b>BXRC-27E1000</b>
3000K (90 CRI)	<b>BXRC-30G1000</b>
3000K	<b>BXRC-30E1000</b>
3500K	<b>BXRC-35E1000</b>
4000K	<b>BXRC-40E1000</b>

### INTERCHANGABLE OPTICS

Model	Beam
<b>RF-S</b>	20°
<b>RF-F</b>	40°

### LENSES

Color Lens	<b>AMB</b>	Amber	Frosted Lens	<b>LENS-16-FR</b>	
	<b>BLU</b>	Blue		Spread Lens	<b>LENS-16-SPR</b>
	<b>GRN</b>	Green		Beam Elongating	<b>LENS-16-BEL</b>
	<b>RED</b>	Red			
	<b>YEL</b>	Yellow			

### ORDER NUMBER

Track Type	System	Model	Beam	Color Temp	Finish
Single-Circuit H, L, J/J2 Track	L H 120V J	LED20	S 20°	<b>927</b> 2700K (90 CRI)	BK Black BN Brushed Nickel WT White
			F 40°	<b>27</b> 2700K	
				<b>930</b> 3000K (90 CRI)	
				<b>30</b> 3000K	
				<b>35</b> 3500K	
				<b>40</b> 4000K	

- **LED20**  -  -

Example: L-LED20S-30-WT

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760