
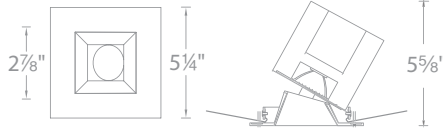


# HR-3LED-T518

3.5" Tesla™ LED Square 0-30° Adjustable

# WAC LIGHTING

Responsible Lighting®

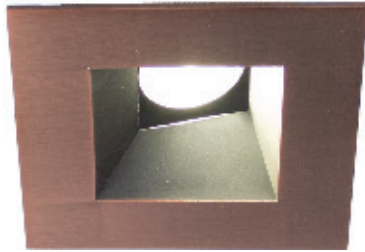

Fixture Type:

Catalog Number:

Project:

Location:

## PRODUCT DESCRIPTION

Minimum profile, square 0° to 30° adjustable trim with interior open reflector

## FEATURES

- 3.5" aperture
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

## SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

**Power Consumption:** 21.5W

**Dimming:** 0-10V Dimming: 100%-10%  
ELV Dimming: 100%-15% (120V only)


**Mounting:** Two heavy gauge retention clips hold trim firmly to housing.

**Finish:** Powder coated white  
Electroplated brushed nickel and copper bronze

**Standards:** ETL & cETL Listed.

## TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
HR-3LED-T518 0° to 30° Adjustable	S 15°	27 2700K	85	775	3885	BN Brushed Nickel CB Copper Bronze WT White
		W 3000K	85	830	4395	
		9W 3000K	90	765	4045	
		35 3500K	85	845	4175	
	N 28°	27 2700K	85	815	2015	
		W 3000K	85	855	2115	
		9W 3000K	90	785	1945	
		35 3500K	85	875	2190	
	F 50°	27 2700K	85	785	1105	
		W 3000K	85	865	1195	
		9W 3000K	90	795	1100	
		35 3500K	85	860	1205	
		C 4000K	85	790	1170	



**HR-3LED-T518**  -  -

Example: HR-3LED-T518N-C-CB

**COMPATIBLE HOUSINGS** See individual housing spec sheets for complete information.

New Construction

<b>HR-3LED-H18D1-ICA</b> Narrow, IC-Rated, Airtight 120V -277V	<b>HR-3LED-H18D1-ICAC</b> Narrow, IC-Rated, Airtight Chicago Plenum 120V -277V
<b>HR-3LED-H18D-ICA</b> IC-Rated, Airtight 120V -277V	<b>HR-3LED-H18D-ICAC</b> IC-Rated, Airtight Chicago Plenum 120V -277V
<b>HR-3LED-H18D-EMICA</b> IC-Rated, Airtight Emergency Backup Battery 120V	<b>HR3LED-H18D-EMICAF</b> IC-Rated, Airtight Emergency Backup Battery 277V

Remodel

<b>HR-3LED-R22D</b> Non-IC 120V -277V
---

## REPLACEMENT MODULES

Reflectors

Spot	<b>SL-REF-LUX10-S</b>
Narrow Flood	<b>SL-REF-LUX10-N</b>
Flood	<b>SL-REF-LUX10-F</b>

LED

2700K	85 CRI	<b>LXS8-PW27</b>
3000K	85 CRI	<b>LXS8-PW30</b>
3000K	90 CRI	<b>LXS9-PW30</b>
3500K	85 CRI	<b>LXS8-PW35</b>
4000K	85 CRI	<b>LXS8-PW40</b>

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760