


HR3LEDT818P

3.5" Tesla™ Pro LED Shower Trim

WAC LIGHTING

Responsible Lighting®

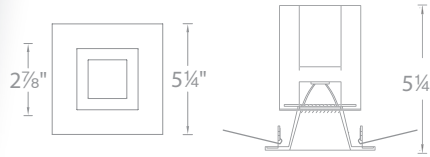

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, square shower trim with interior open reflector

FEATURES

- 3.5" aperture
- Wet location listed
- 30° visual cutoff angle for glare control
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W

Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)


Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed. Fixtures with * are Title 24 JA8-2016 Compliant.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
HR3LEDT818P Shower Light Wet Location Listed	N 30°	827 2700K	85	1120	2281	BN Brushed Nickel CB Copper Bronze WT White
		927* 2700K	90	950	1936	
		830 3000K	85	1165	2351	
		930* 3000K	90	1065	2183	
		835 3500K	85	1270	2563	
		840 4000K	85	1295	2603	



HR3LEDT818P

Example: **HR3LEDT818PN835CB**

COMPATIBLE HOUSINGS *See individual housing spec sheets for complete information.*

New Construction

HR-3LED-H18D1-ICA Narrow, IC-Rated, Airtight	120V -277V	HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-ICA IC-Rated, Airtight	120V -277V	HR-3LED-H18D-ICAC IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-EMICA IC-Rated, Airtight Emergency Backup Battery	120V	HR3LED-H18D-EMICAF IC-Rated, Airtight Emergency Backup Battery	277V
HR-3LED-H18D-A New Construction Non-IC, Airtight	120V-277V		

Remodel

HR-3LED-R18D-A Non-IC, Airtight	120V -277V	HR-3LED-R22D Non-IC	120V -277V
---	------------	-------------------------------	------------

REPLACEMENT MODULES

Reflectors

Narrow Flood Flood	SL-REF-BL10-1-N SL-REF-BL10-1-F
--------------------	--

LED

2700K (90 CRI)	BXRC-27G1000-B-23
2700K	BXRC-27E1000-B-23
3000K (90 CRI)	BXRC-30G1000-B-23
3000K	BXRC-30E1000-B-23
3500K	BXRC-35E1000-B-23
4000K	BXRC-40E1000-B-23

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760