

# 3.5" OCULUX ARCHITECTURAL Adjustable Pinhole - R3CRPT, R3CRPL

WAC LIGHTING  
Responsible Lighting®



Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## PRODUCT DESCRIPTION

Oculux Architectural offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

## FEATURES

- 3 beam angle options included:  
Narrow flood beam film pre-installed, interchangeable flood beam film supplied, remove film for spot beam.
- IC-Rated, Airtight, New Construction
- Adjustable LED light engine included with housing:  
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Shallow housing under 4" depth
- 5 year warranty

## SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Dimming:** 100% - 1% TRIAC, ELV  
100% - 5%, 0-10V
- Input Power:** 13.5W, 120V-277V 50/60Hz
- Light Source:** High output COB LED rated life of 50,000 hours.
- Mounting:** Retention clips firmly hold trim to housing. Cutout 4¼"
- Finish:** Powder coated white.
- Ceiling thickness:** ½" - 1"
- Standards:** UL & cUL, Wet location listed. Energy Star® 2.0  
Title 24 JA8-2016 Compliant
- Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

Trims (Order Housing Separately)	Model	Beam	Color Temp	Lumens	CBCP	Finish
<p><b>R3CRPT</b> Round Trim Adjustable Pinhole</p>	Spot 16°	927 2700K	720 5008	WT White		
		930 3000K	770 5385			
		935 3500K	790 5493			
	Narrow Flood 32°	940 4000K	825 5762			
		927 2700K	630 1425			
		930 3000K	675 1532			
	Flood 44°	935 3500K	690 1563			
		940 4000K	720 1640			
		927 2700K	580 824			
<p><b>R3CRPL</b> Round Trimless Adjustable Pinhole</p>	Spot 16°	930 3000K	770 5385			
		935 3500K	790 5493			
		940 4000K	825 5762			
	Narrow Flood 32°	927 2700K	630 1425			
		930 3000K	675 1532			
		935 3500K	690 1563			
	Flood 44°	940 4000K	720 1640			
		927 2700K	580 824			
		930 3000K	625 886			
		935 3500K	635 904			
		940 4000K	665 948			

R3CRP\_\_-\_\_\_\_\_

Example: R3CRPT-WT

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122


Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# 3.5" OCULUX ARCHITECTUAL

## Adjustable Pinhole - R3CRPT, R3CRPL

WAC LIGHTING  
Responsible Lighting®

Housings (Required) - Order separately from trims

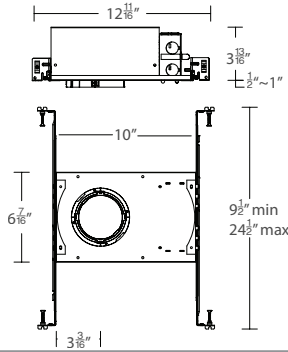

Model Color Temp Input

<b>R3CRN-11</b> IC-Rated, Airtight New Construction	<b>927</b>	2700K	120V - 277V
	<b>930</b>	3000K	
	<b>935</b>	3500K	
	<b>940</b>	4000K	

Example: **R3CRN-11-927**

### FEATURES

- Adjustable LED light engine included with housing:  
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Trim or trimless with die-cast spackle frame included.
- Accepts one optional honeycomb louver or optical lens.

### GLARE CONTROL ACCESSORIES sold separately

<b>LENS-16</b>	<b>HCL</b>	Honeycomb Louver
----------------	------------	------------------

### LENS ACCESSORIES sold separately

<b>LENS-16</b>	<b>AMB</b>	Amber
	<b>RED</b>	Red
	<b>FR</b>	Frosted
	<b>SPR</b>	Spread
	<b>BEL</b>	Beam Elongating

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760