


<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**PREMIUM 6" CFL DOWNLIGHT HOUSING**

**R6VF-126/32T-EM/ R6VF-113Q-EM**

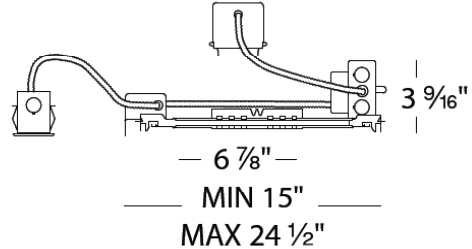

**Ordering Matrix**

Model	Trim
[ ]	[ ]
<b>R6VF-126/32T-EM</b> <b>R6VF-113Q-EM</b>	<i>See our current catalog p.235 for selections</i>

Ordering Example (*model + trim*): R6VF-126/32T-EM + trim number

**Product Details**

<b>Description:</b>	Premium CFL Non-IC-rated new construction housing. Integral 90 minute emergency backup battery pack complies with all current emergency egress codes. Pre-wired test switch with surface mounting cover plate.
<b>Materials:</b>	Frame and junction box are 20 gauge galvanized steel. Electrical component is an electronic ballast.
<b>J-Box:</b>	Seven knockouts and four integral non-metallic sheathed cable wiring connectors provided for ease of installation. Rated for branch wiring.
<b>Lamping:</b>	<i>R6VF-126/32T-EM</i> uses 1x26/32w lamp <i>R6VF-113Q-EM</i> uses 1x13w Quad 4-pin lamp Lamps are sold separately.
<b>Ratings:</b>	Non-IC rated. Insulation must be kept at least 3 inches away from the housing. U.L. listed for through branch circuit wiring
<b>Mounting:</b>	Supplied with hanger bars, with a maximum adjustable length of 24" to accommodate various joist and grid sizes. Hanger bars have nailers for wood joists as well as slots for easy mounting on "T" bars. Accommodates surface thickness of up to 3/4". 6 7/8" cutout hole.

**Specification Features**

- Junction box and ballast are accessible from below the ceiling. Spring loaded j-box door for easy access to wiring.
- Hanger bar slots are located on all four sides of the frame.
- 5 year WAC Lighting product warranty.