

# FLEXRAIL2

## MODELS HM-W218

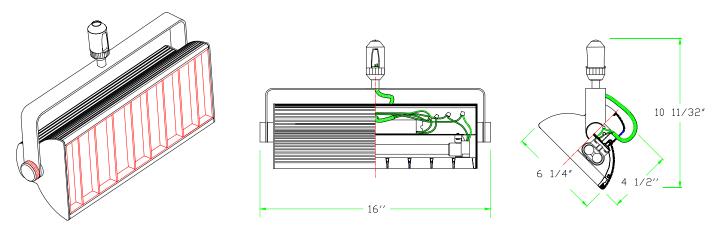



### **Product Features**

**Application:** Wall wash 120V compact fluorescent fixture head for use on Flexrail2. Available in Platinum finish only. Employs two 18W\* lamps, with built in electronic ballast. Fixture is not supplied with a louver.

Lamp: Houses two compact fluorescent Biax® lamps, not supplied.

Aiming: Permits 180º Vertical and 354º rotational aiming.

Ballast: High power factor electronic.

Socket: 2G11 four pin base.

# \* Watts and engineering data based on GE Biax® lamps.

Engineering Data	
Input Voltage	120V 50/60Hz
Operating Input Power (W)	39W
Input Current (A)	0.36 Amp
Power Factor	0.94
Protection: Open Lamp / Shorted Lamp	Yes
Ballast Min. Starting Temp.	-20°F
Ballast Factor (%)	95%

### **Options/Accessories**

Aluminum louvers are available in Black (L218-BK), White (L218-WT), and Specular Clear (L218-CL).

Compact Fluorescent Brand Name Cross-Reference		
GE	Osram/Sylvania	Philips
Biax®	Dulux®L	PL
F18BX	FT18DL	PL-L18W
	Base style 2G11	

### Material

Extruded aluminum housing with specular aluminum reflector, and steel yoke.

#### Listings

UL, CUL Listed

W.A.C. reserves the right to change details that do not affect overall function and performance.



615 South Street, Garden City, NY 11530 Tel: (516) 515-5000 Fax: (516) 516-5050