INSTRUCTIONS: Models:

Flexrail2 Suspension & Ceiling Installation HM-TB6,HM-TB12, HM-TB24, HM-TB36, HM-TB48 HM-X6, HM-X12, HM-X24, HM-X36, HM-X48 HM-XS6, HM-XS12, HM-XS24, HM-XS36, HM-XS48


Rail mounting:

Rail can be mounted on a flat surface, a sloped ceiling, or a suspended ceiling.


- Use three standoffs for every 8ft of straight rail (support every 42"). Curved rail requires more supports. Field curved track sections should be supported every 32" If using heavy elements such as pendants or ballasted fixtures place a support not more than 8" from the fixture mount (see diagram below).
- Assemble rail at floor level then, raise to ceiling and mark standoff locations.
- 3. If rail cannot be raised, use a plumb line to mark standoff locations.
- 4. For drywall, drill 5/8" holes and insert ceiling anchors (supplied) through the bases of the standoffs and then into the ceiling (shown) tighten until snug. For wood surfaces use wood screws through the standoff bases and fully tighten.

For "T" bars (It is recommended that bars be reinforced with Caddy® clips to the ceiling structure) Twist "T" bar clip onto the "T" bar, then proceed to step 6. For support at a ceiling panel install a support frame between two T-bars.

- 5. Install the standoff shaft into the base by threading clockwise.
- 6. Unscrew the cap from the bottom of the rail adapter. With the adapter now open, raise the rail into position and re-install the cap.
- 7. Work from the center outward. Repeat procedure for remaining standoffs.

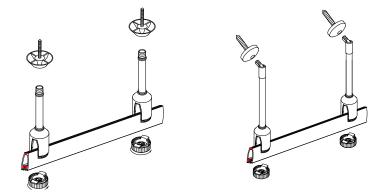

HM-X for flat ceiling use HM-XS for slope ceiling use

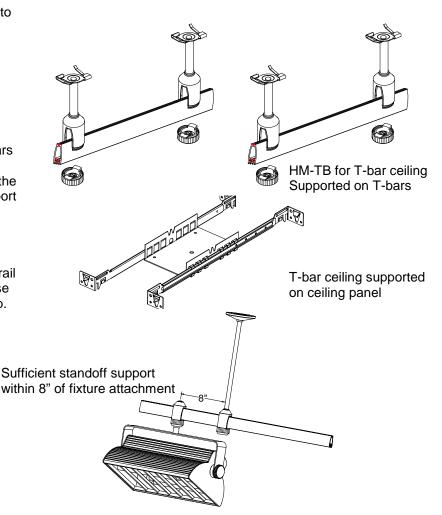



Retain these instructions for future service and adjustments 615 South Street, Garden City, NY 11530 Tel: (516) 515-5000 Fax (516) 515-5050 www.waclighting.com