


<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**FLEXRAIL2 – MH TRACK HEAD**

**SERIES HM-783**

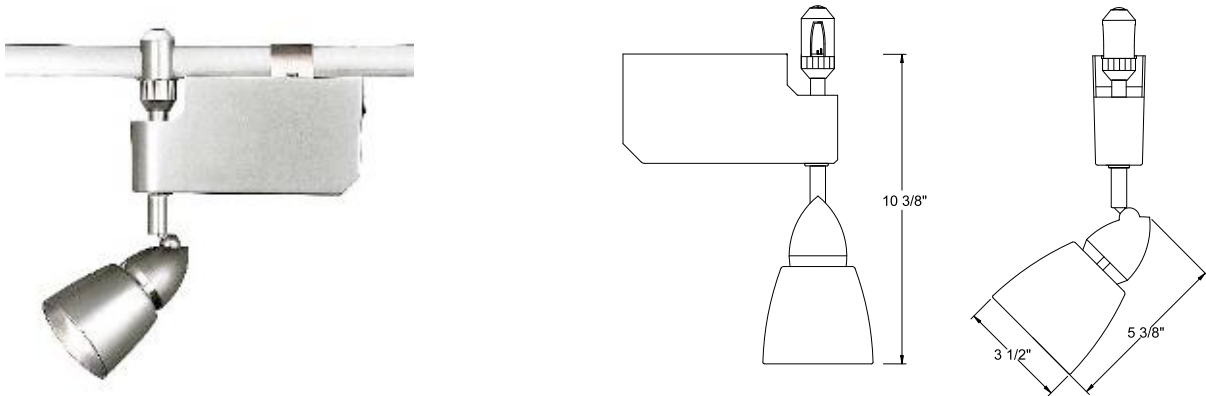

**Ordering Matrix**

Model	Lamp	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>
HM-783	MH39E	PT DB

Ordering Example (*model number – lamp – finish*): HM-783-MH39E-PT

**Product Details**

**Description:** Flexrail2 compatible metal halide track head utilizing PAR20 MH lamps and electronic ballasts. Ballast case has integral on / off switch and support security bracket.

**Materials:** Ballast case and lampholder assembly are die cast aluminum, track head cone is corrosion protected steel. Lamp socket is medium base porcelain with nickel-plated copper shell, 4 kV rated.

**Ballast:** Pulse start electronic ballast, 120V.

**Aiming:** 350° horizontal rotation and 90° vertical aiming with integral ball and swivel mounting feature. Adjustment of aiming angle is accomplished without the need for tools.

**Lamping:** MH39E = 39w PAR20 metal halide

**Finish:** Abrasion resistant platinum or bronze paint finish.  
PT = Platinum metal finish  
DB = Dark Bronze finish

**Listing:** UL & CUL Listed.

**Specification Features**

- Modern cone design architectural grade track head utilizing high color rendering (CRI) metal halide lamps.
- Ballast case has integral on / off switch for easy lamp maintenance when track heads are mounted on a complete system.
- Electronic ballast consumes less energy than similar wattage magnetic ballast. This ballast increases lamp life, has end of life protection and reduces visual flicker.
- 5 year product warranty.

**39w Ballast Data**

ANSI #	M-130
Operating Amps	0.37A
Total Input Power	44W
Power Factor	>95%
Sound Rating	A
Harmonic Distortion	<10%